


ULT28 应变加速度传感器

具有静态频率响应好、灵敏度高、过载保护等特点。可与应变仪联用，组成测量系统，特别适合于低频振动测量。

型号	量程	频率范围(± 10%)	灵敏度		非线性	桥路电阻	横向	安全过载	工作温度
	g		Hz	$\mu\epsilon/g$					
ULT2801	± 10	0-200	90	0.45	1	120 Ω	5%	300%	-20_+60°C
ULT2802	± 20	0-320	40	0.4	1	120 Ω	5%	300%	-20_+60°C
ULT2803	± 50	0-500	16	0.4	1	120 Ω	5%	300%	-20_+60°C
ULT2804	± 100	0-800	5	0.3	3	120 Ω	5%	300%	-20_+60°C
ULT2805	± 200	0-1000	4	0.4	3	120 Ω	5%	300%	-20_+60°C
ULT2806	± 500	0-2000	2	0.5	3	120 Ω	5%	300%	-20_+60°C
ULT2807	± 1000	0-3000	1	0.5	3	120 Ω	5%	300%	-20_+60°C

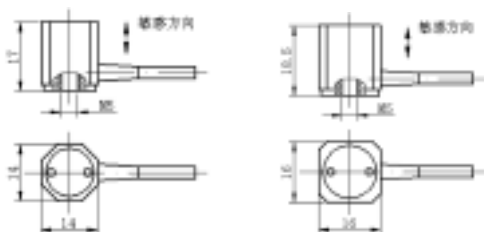

ULT2801、ULT2802、ULT2803

ULT2804、ULT2805、
ULT2806、ULT2807



ULT2801

ULT2802

ULT2804

ULT29 应变压力传感器

ULT29 系列产品为测量流体压强而专门设计，在石油、化工、冶金、机械、车辆等工业领域得到广泛应用

型号	量程	满量程输出	零点	重复性	回程	线性	电源	安装方式	
								(一)	(二)
ULT2901	1,2,5,10,20	1~2mV/V.FS	0 ± 3% mV/V	0.1,0.2,0.5,1	0.1,0.2,0.5,1	0.1,0.2,0.5,1	+ 10	2 英寸由任接头 法兰盘安装	M12 × 1
ULT2902	50,100,200	± 5V ± 0.0025V	0 ± 2.5mV	0.1,0.2,0.5,1	0.1,0.2,0.5,1	0.1,0.2,0.5,1	± 15		M14 × 1
ULT2903		20mA ± 0.2mA	4 ± 0.1mA	0.1,0.2,0.5,1	0.1,0.2,0.5,1	0.1,0.2,0.5,1	± 15		M20 × 1.5
ULT2904		10kHz ± 0.01kHz	0 ± 10Hz	0.1,0.2,0.5,1	0.1,0.2,0.5,1	0.1,0.2,0.5,1	± 15		螺纹安装

工作介质：内部：油、水等中性介质；

外部：不腐蚀线路板、电子元器件、引线、接插件

过 压：额定压力的 3 倍



ULT2901



ULT2904